

Konfigurasi PHP

Edit php.ini

Gunakan perintah berikut untuk mengedit file **php.ini** menggunakan aplikasi *Nano*:

```
nano /etc/php.ini
```

Temukan beberapa *string* berikut, hilangkan tanda “;” di depannya dan sesuaikan paramaternya seperti di bawah:

date.timezone = Asia/Jakarta


upload_max_filesize = 1G

post_max_size = 1G

Khusus untuk **date.timezone**, sesuaikan nama kota dengan zona waktu kantor satuan kerja berada, yaitu:

- **Asia/Jakarta** untuk zona Waktu Indonesia Barat
- **Asia/Makassar** untuk zona Waktu Indonesia Tengah
- **Asia/Jayapura** untuk zona Waktu Indonesia Timur

Teks di atas jangan Anda copy, melainkan dengan mencarinya dengan menekan kombinasi tombol Ctrl+W, lalu ketikkan string yang dicari dan tekan Enter di keyboard. Lalu ubah teksnya seperti arahan di atas.

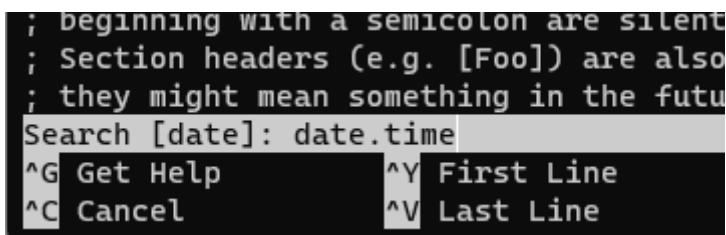

The screenshot shows the Nano text editor interface. At the top, there are instructions: "; beginning with a semicolon are silent", "; Section headers (e.g. [Foo]) are also", and "; they might mean something in the futu". Below this, a search bar shows "Search [date]: date.time". At the bottom, there are four options: "^G Get Help", "^Y First Line", "^C Cancel", and "^V Last Line".

```
[Date]
; Defines the default timezone used by the default configuration
; http://php.net/date.timezone
date.timezone = Asia/Jakarta

; http://php.net/date.default-latitude
;date.default_latitude = 31.7667
```


Jika sudah selesai, simpan file tersebut dengan menekan kombinasi tombol **Ctrl+O**, kemudian **tekan Enter di keyboard**. Untuk keluar dari editor *Nano*, tekan kombinasi tombol **Ctrl+W**.

Kemudian restart *Apache* dengan perintah:

```
systemctl restart httpd
```

Pastikan *service* *Apache* berjalan setelah dilakukan konfigurasi, dengan perintah:

```
systemctl status httpd
```

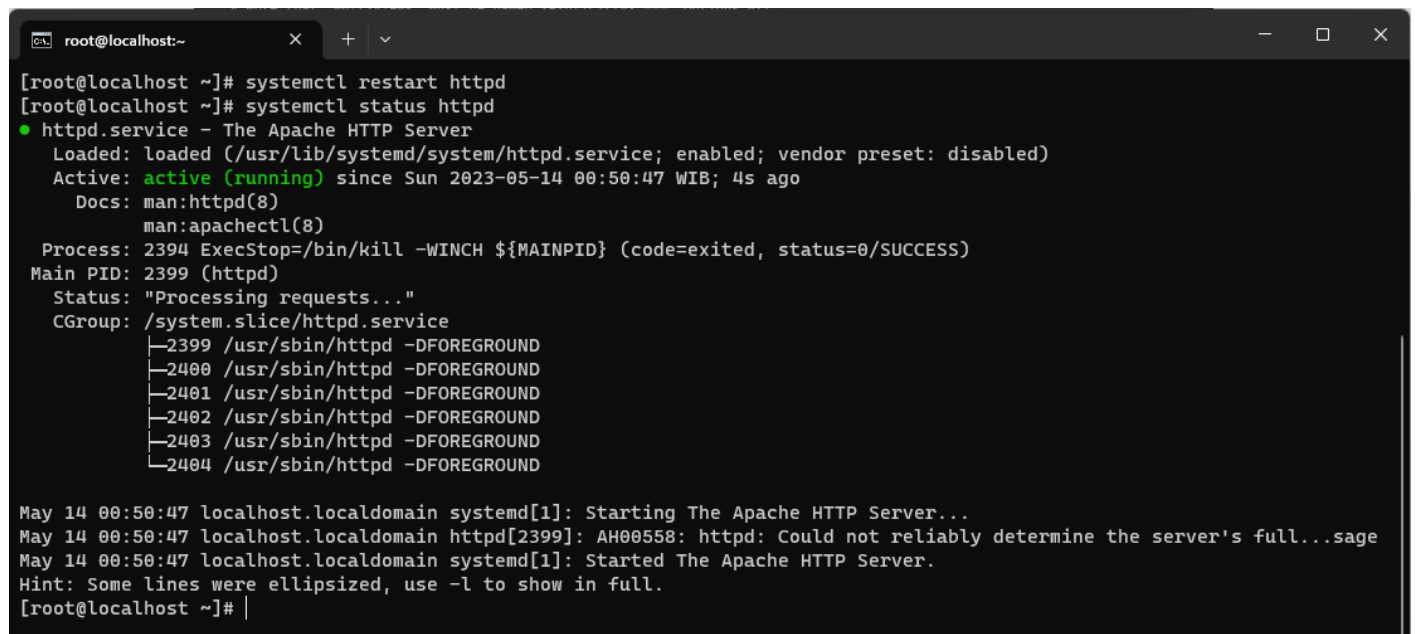

```
root@localhost:~  
[root@localhost ~]# systemctl restart httpd  
[root@localhost ~]# systemctl status httpd  
● httpd.service - The Apache HTTP Server  
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; enabled; vendor preset: disabled)  
   Active: active (running) since Sun 2023-05-14 00:50:47 WIB; 4s ago  
     Docs: man:httpd(8)  
           man:apachectl(8)  
  Process: 2394 ExecStop=/bin/kill -WINCH ${MAINPID} (code=exited, status=0/SUCCESS)  
 Main PID: 2399 (httpd)  
   Status: "Processing requests..."  
    CGroup: /system.slice/httpd.service  
            └─2399 /usr/sbin/httpd -DFOREGROUND  
            └─2400 /usr/sbin/httpd -DFOREGROUND  
            └─2401 /usr/sbin/httpd -DFOREGROUND  
            └─2402 /usr/sbin/httpd -DFOREGROUND  
            └─2403 /usr/sbin/httpd -DFOREGROUND  
            └─2404 /usr/sbin/httpd -DFOREGROUND  
  
May 14 00:50:47 localhost.localdomain systemd[1]: Starting The Apache HTTP Server...  
May 14 00:50:47 localhost.localdomain httpd[2399]: AH00558: httpd: Could not reliably determine the server's full...sage  
May 14 00:50:47 localhost.localdomain systemd[1]: Started The Apache HTTP Server.  
Hint: Some lines were ellipsized, use -l to show in full.  
[root@localhost ~]#
```

Jika pada respon dari CentOS terlihat tulisan hijau **active (running)**, menandakan bahwa konfigurasi telah berhasil.

Revision #4

Created 8 October 2024 16:59:46 by aulia_badilag

Updated 10 October 2024 09:11:42 by aulia_badilag